





100 series



D-SUB SOLDER TYPE

| Position | A | B | C | D | E |
|----------|-------|-------|-------|-------|-------|
| 9 | 16.92 | 24.99 | 30.81 | 19.36 | 16.33 |
| 15 | 25.25 | 33.32 | 39.14 | 27.64 | 24.66 |
| 25 | 38.96 | 47.04 | 53.04 | 41.08 | 38.38 |
| 37 | 55.42 | 63.50 | 69.32 | 57.38 | 54.84 |

[MALE]



[FEMALE]




Specifications:

Contact Resistance: 30mΩ max.at DC 100 mA
 Insulator Resistance: 1000MΩ min.at DC 500V
 Current Rating: 5AMP

Dielectric Withstanding

Voltage: AC 1000V For 1 minute
 Operating Temperature: -55° C--+105° C
 Contact: Brass or Phosphor Bronze
 Housing: PBT &30% Glass Fiber(UL 94V-0)

How To Order

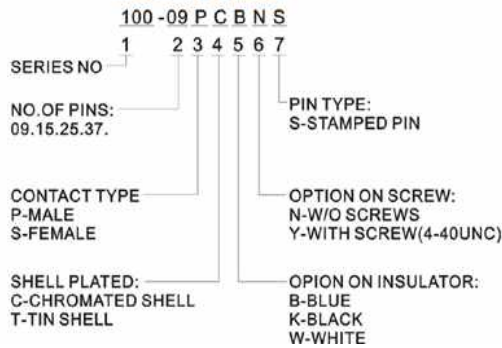





101 series



D-SUB DIP STRAIGHT TYPE

| Position | A | B | C | D | E |
|----------|-------|-------|-------|-------|-------|
| 9 | 17.78 | 24.99 | 31.04 | 19.36 | 16.33 |
| 15 | 26.15 | 33.32 | 39.24 | 27.64 | 24.66 |
| 25 | 39.94 | 47.04 | 53.04 | 41.08 | 38.38 |
| 37 | 56.56 | 63.50 | 69.62 | 57.38 | 54.84 |

[MALE]



[FEMALE]




Specifications:

Contact Resistance: 30mΩ max.at DC 100 mA
 Insulator Resistance: 1000MΩ min.at DC 500V
 Current Rating: 5AMP

Dielectric Withstanding

Voltage: AC 1000V For 1 minute
 Operating Temperature: -55° C--+105° C
 Contact: Brass or Phosphor Bronze
 Housing: PBT &30% Glass Fiber(UL 94V-0)

How To Order

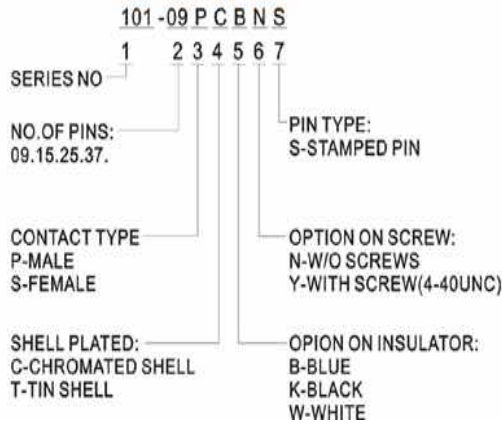





103 series




D-SUB I.D.C. TYPE

| Position | A | B | C | D | E |
|----------|-------|-------|-------|-------|-------|
| 9 | 17.78 | 24.99 | 31.04 | 19.36 | 16.33 |
| 15 | 26.15 | 33.32 | 39.24 | 27.64 | 24.66 |
| 25 | 39.94 | 47.04 | 53.04 | 41.08 | 38.38 |
| 37 | 56.56 | 63.50 | 69.62 | 57.38 | 54.84 |

[MALE]



[FEMALE]



Specifications:


Contact Resistance: 30mΩ max.at DC 100 mA
 Insulator Resistance: 1000MΩ min.at DC 500V
 Current Rating: 1AMP

Dielectric Withstanding

Voltage: AC 500V For 1 minute
 Operating Temperature: -55° C--+105° C
 Contact: Male Brass
 Female Phosphor Bronze
 Housing: PBT &30% Glass Fiber(UL 94V-0)

How To Order

103 - 09 P M B 1

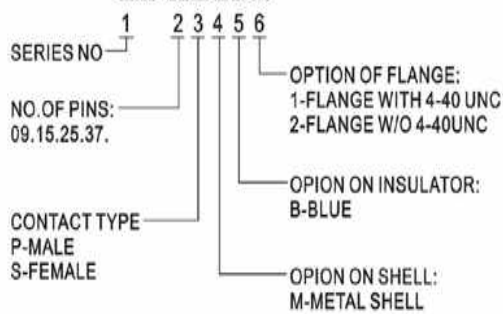





104 series



D-SUB H.D. SOLDER TYPE

| Position | A | B | C | D | E | F |
|----------|------|------|------|-------|------|-------|
| 15 | 30.9 | 17.7 | 2.29 | 24.99 | 19.3 | 16.33 |
| 26 | 39.1 | 25.3 | 2.29 | 33.32 | 27.5 | 24.7 |
| 44 | 53.0 | 39.0 | 2.29 | 47.04 | 41.3 | 38.4 |
| 62 | 69.3 | 55.4 | 2.41 | 63.50 | 57.7 | 54.8 |

[MALE]



[FEMALE]



Specifications:


Contact Resistance: 30mΩ max.at DC 100 mA
 Insulator Resistance: 1000MΩ min.at DC 500V
 Current Rating: 3AMP

Dielectric Withstanding

Voltage: AC 1000V For 1 minute
 Operating Temperature: -55° C--+105° C
 Contact: Brass or Phosphor Bronze
 Housing: PBT &30% Glass Fiber(UL 94V-0)

How To Order

104 - 15 P C B N S

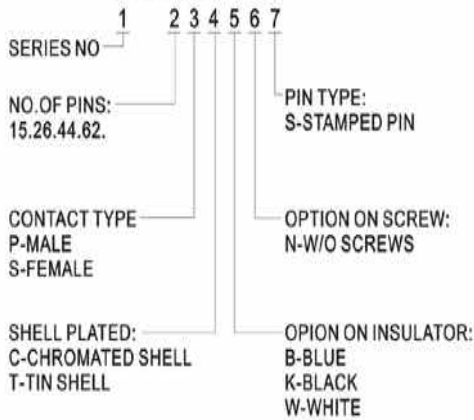



107 series

D-SUB RIGHT ANGLE TYPE (7.2mm 9.4mm 13.84mm)

| Position | A | B | C | D |
|----------|-------|-------|-------|-------|
| 9 | 17.78 | 24.99 | 31.04 | 16.33 |
| 15 | 24.15 | 33.32 | 39.24 | 24.86 |
| 25 | 39.94 | 47.04 | 53.04 | 38.66 |
| 37 | 56.56 | 63.50 | 69.52 | 54.84 |

| | E | F | G |
|---|-------|-------|-------|
| B | 7.2 | 18.4 | 9.62 |
| D | 9.4 | 20.54 | 12.06 |
| C | 13.84 | 25.3 | 16.5 |


Specifications:

Contact Resistance: 30mΩ max.at DC 100 mA
 Insulator Resistance: 1000MΩ min.at DC 500V
 Current Rating: 6AMP


Dielectric Withstanding

Voltage: AC 1000V For 1 minute
 Operating Temperature: -55° C--+105° C
 Contact: Brass or Phosphor Bronze
 Housing: PBT &30% Glass Fiber(UL 94V-0)


How To Order

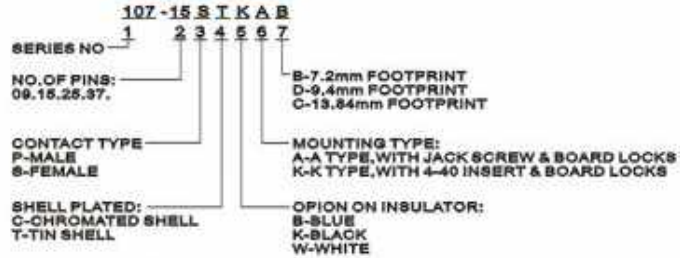

[MALE]

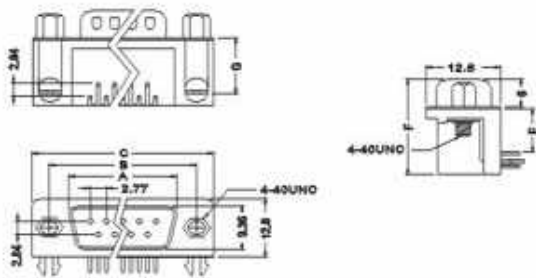

[FEMALE]

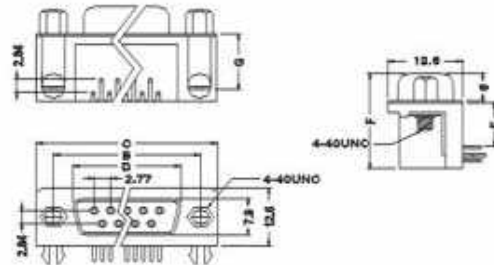

D-SUB CONNECTORS RIGHT ANGLE MOUNTING OPTIONS

