





112-A series

PIN HEADER 2.54mm(0.100")

[SINGLE ROW]

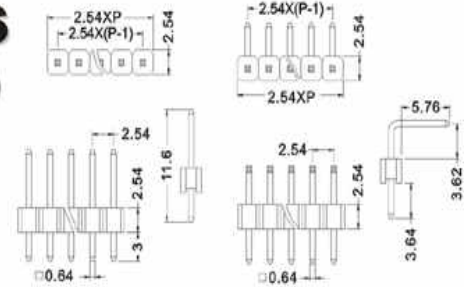

[DUAL ROW]

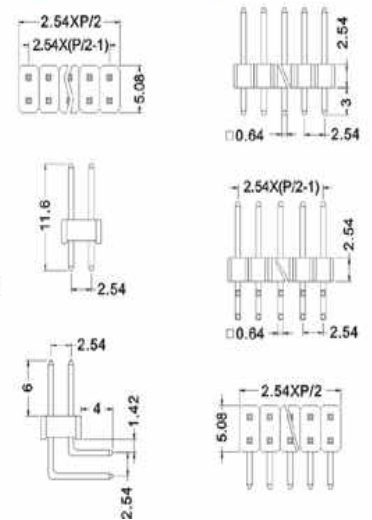

Specifications:


Contact Resistance: 30m Ω max.at DC 100 mA
 Insulator Resistance: 1000M Ω min.at DC 500V
 Current Rating: 1AMP

Dielectric Withstanding

Voltage: AC 500V For 1 minute
 Operating Temperature: -55° C--+105° C
 Contact: Brass
 Housing: PBT &30% Glass Fiber(UL 94V-0)

How To Order

112-A-S S 40G



CONTACT PLATED:
 T-ALL TIN PLATED
 G-ALL GOLD PLATED


NO.OF PINS:
 SINGLE ROW FROM 01 TO 40
 DOUBLE ROW FROM 04 TO 80




113 series

PIN HEADER 2.0mm(0.079")

[SINGLE ROW]



[DUAL ROW]



Specifications:


Contact Resistance: 30m Ω max.at DC 100 mA
 Insulator Resistance: 1000M Ω min.at DC 500V
 Current Rating: 1AMP

Dielectric Withstanding


Voltage: AC 500V For 1 minute
 Operating Temperature: -55° C--+105° C
 Contact: Phosphor Bronze
 Housing: PBT &30% Glass Fiber(UL 94V-0)

How To Order

113-S S 40 G M



This PDF was created using the **Sonic PDF Creator**.
 To remove this watermark, please license this product at www.investintech.com



114-A series

P.C.B SOCKET 2.54mm(0.100")

Specifications:

Contact Resistance: 30mΩ max.at DC 100 mA
 Insulator Resistance: 1000MΩ min.at DC 500V
 Current Rating: 1AMP

Dielectric Withstanding

Voltage: AC 500V For 1 minute
 Operating Temperature: -55° C--+105° C
 Contact: Phosphor Bronze
 Housing: PBT &30% Glass Fiber(UL 94V-0)

How To Order

114-A -S S 40G

SERIES NO 1 2 3 4 5


ROW TYPE:
 D-DOUBLE ROW
 S-SINGLE ROW

TERMINAL TYPE:
 S-STRAIGHT TYPE
 R-RIGHT ANGLE TYPE


CONTACT PLATED:
 T-ALL TIN PLATED
 G-ALL GOLD PLATED

NO.OF PINS:
 SINGLE ROW FROM 01 TO 40
 DOUBLE ROW FROM 04 TO 80


[SINGLE ROW]



[DUAL ROW]





This PDF was created using the Sonic PDF Creator.
 To remove this watermark, please license this product at www.investintech.com

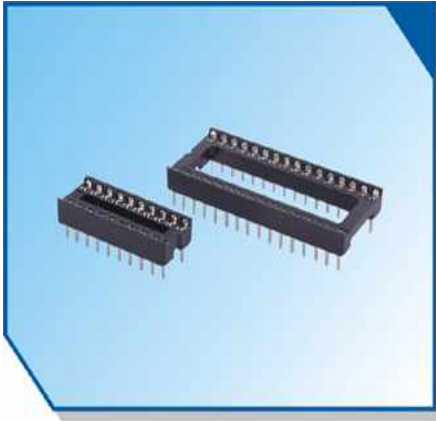

125 series

IC SOCKET 2.54mm(0.100")

Position	Dimension				Position	Dimension			
	A	B	C	D		A	B	C	D
6	7.52	7.62	10.16	7.62	24	30.48	27.94	17.78	15.24
8	10.16	7.62	10.16	7.62	28	35.56	33.02	10.16	7.62
14	17.82	15.24	10.16	7.62	28	35.56	33.02	17.78	15.24
16	20.32	17.78	10.16	7.62	32	40.54	38.10	17.68	15.24
18	22.86	20.32	10.16	7.62	40	50.80	48.26	17.78	15.24
20	25.40	22.86	10.16	7.62	42	53.21	50.80	17.68	15.24
24	30.48	27.94	10.16	7.62					





Specifications:

Contact Resistance: 30mΩ max.at DC 100 mA
 Insulator Resistance: 1000MΩ min.at DC 500V
 Current Rating: 1AMP

Dielectric Withstanding

Voltage: AC 500V For 1 minute
 Operating Temperature: -55° C--+105° C
 Contact: Phosphor Bronze
 Housing: PBT &30% Glass Fiber(UL 94V-0)

How To Order

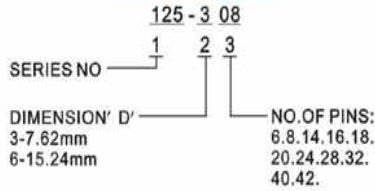




126 series

IC SOCKET 2.54mm(0.100")

Position	Dimension				Position	Dimension			
	A	B	C	D		A	B	C	D
6	7.52	7.62	10.16	7.62	24	30.48	27.94	10.16	7.62
8	10.16	7.62	10.16	7.62	24	30.48	27.94	17.78	15.24
14	17.82	15.24	10.16	7.62	28	35.56	33.02	10.16	7.62
16	20.32	17.78	10.16	7.62	28	35.56	33.02	17.78	15.24
18	22.86	20.32	10.16	7.62	40	50.80	48.26	17.78	15.24
20	25.40	22.86	10.16	7.62					



Specifications:




Contact Resistance: 30mΩ max.at DC 100 mA
 Insulator Resistance: 1000MΩ min.at DC 500V
 Current Rating: 1AMP

Dielectric Withstanding

Voltage: AC 500V For 1 minute
 Operating Temperature: -55° C--+105° C
 Contact: Phosphor Bronze
 Housing: PBT &30% Glass Fiber(UL 94V-0)

How To Order

126 -3 08 R T M


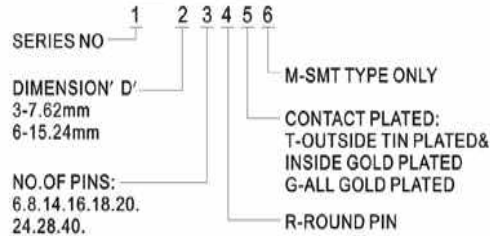




128 series

P.L.C.C SOCKET

Position	A	B	C	D
28	7.62	18.10	22.20	12.70
32	7.62	18.80	25.70	12.70
32	10.16	21.30	25.70	15.24
44	12.70	23.50	29.80	17.78
52	15.24	26.00	32.64	20.32
68	20.32	30.20	40.10	25.40
84	25.40	35.20	46.90	30.48

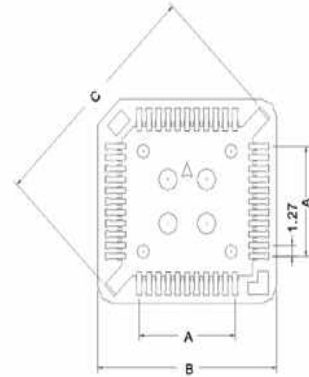

Specifications:

Contact Resistance: 30m Ω max.at DC 100 mA
 Insulator Resistance: 1000M Ω min.at DC 500V
 Current Rating: 1AMP

Dielectric Withstanding

Voltage: AC 500V For 1 minute
 Operating Temperature: -55° C--+105° C
 Contact: Phosphor Bronze
 Housing: PPS &40% Glass Fiber(UL 94V-0)
 PBT &30% Glass Fiber(UL 94V-0)

How To Order

